




Cordless Impact Driver DTD154Z



High rotational speed
3,600r/min

Optimum for fast tightening of self-drilling screws

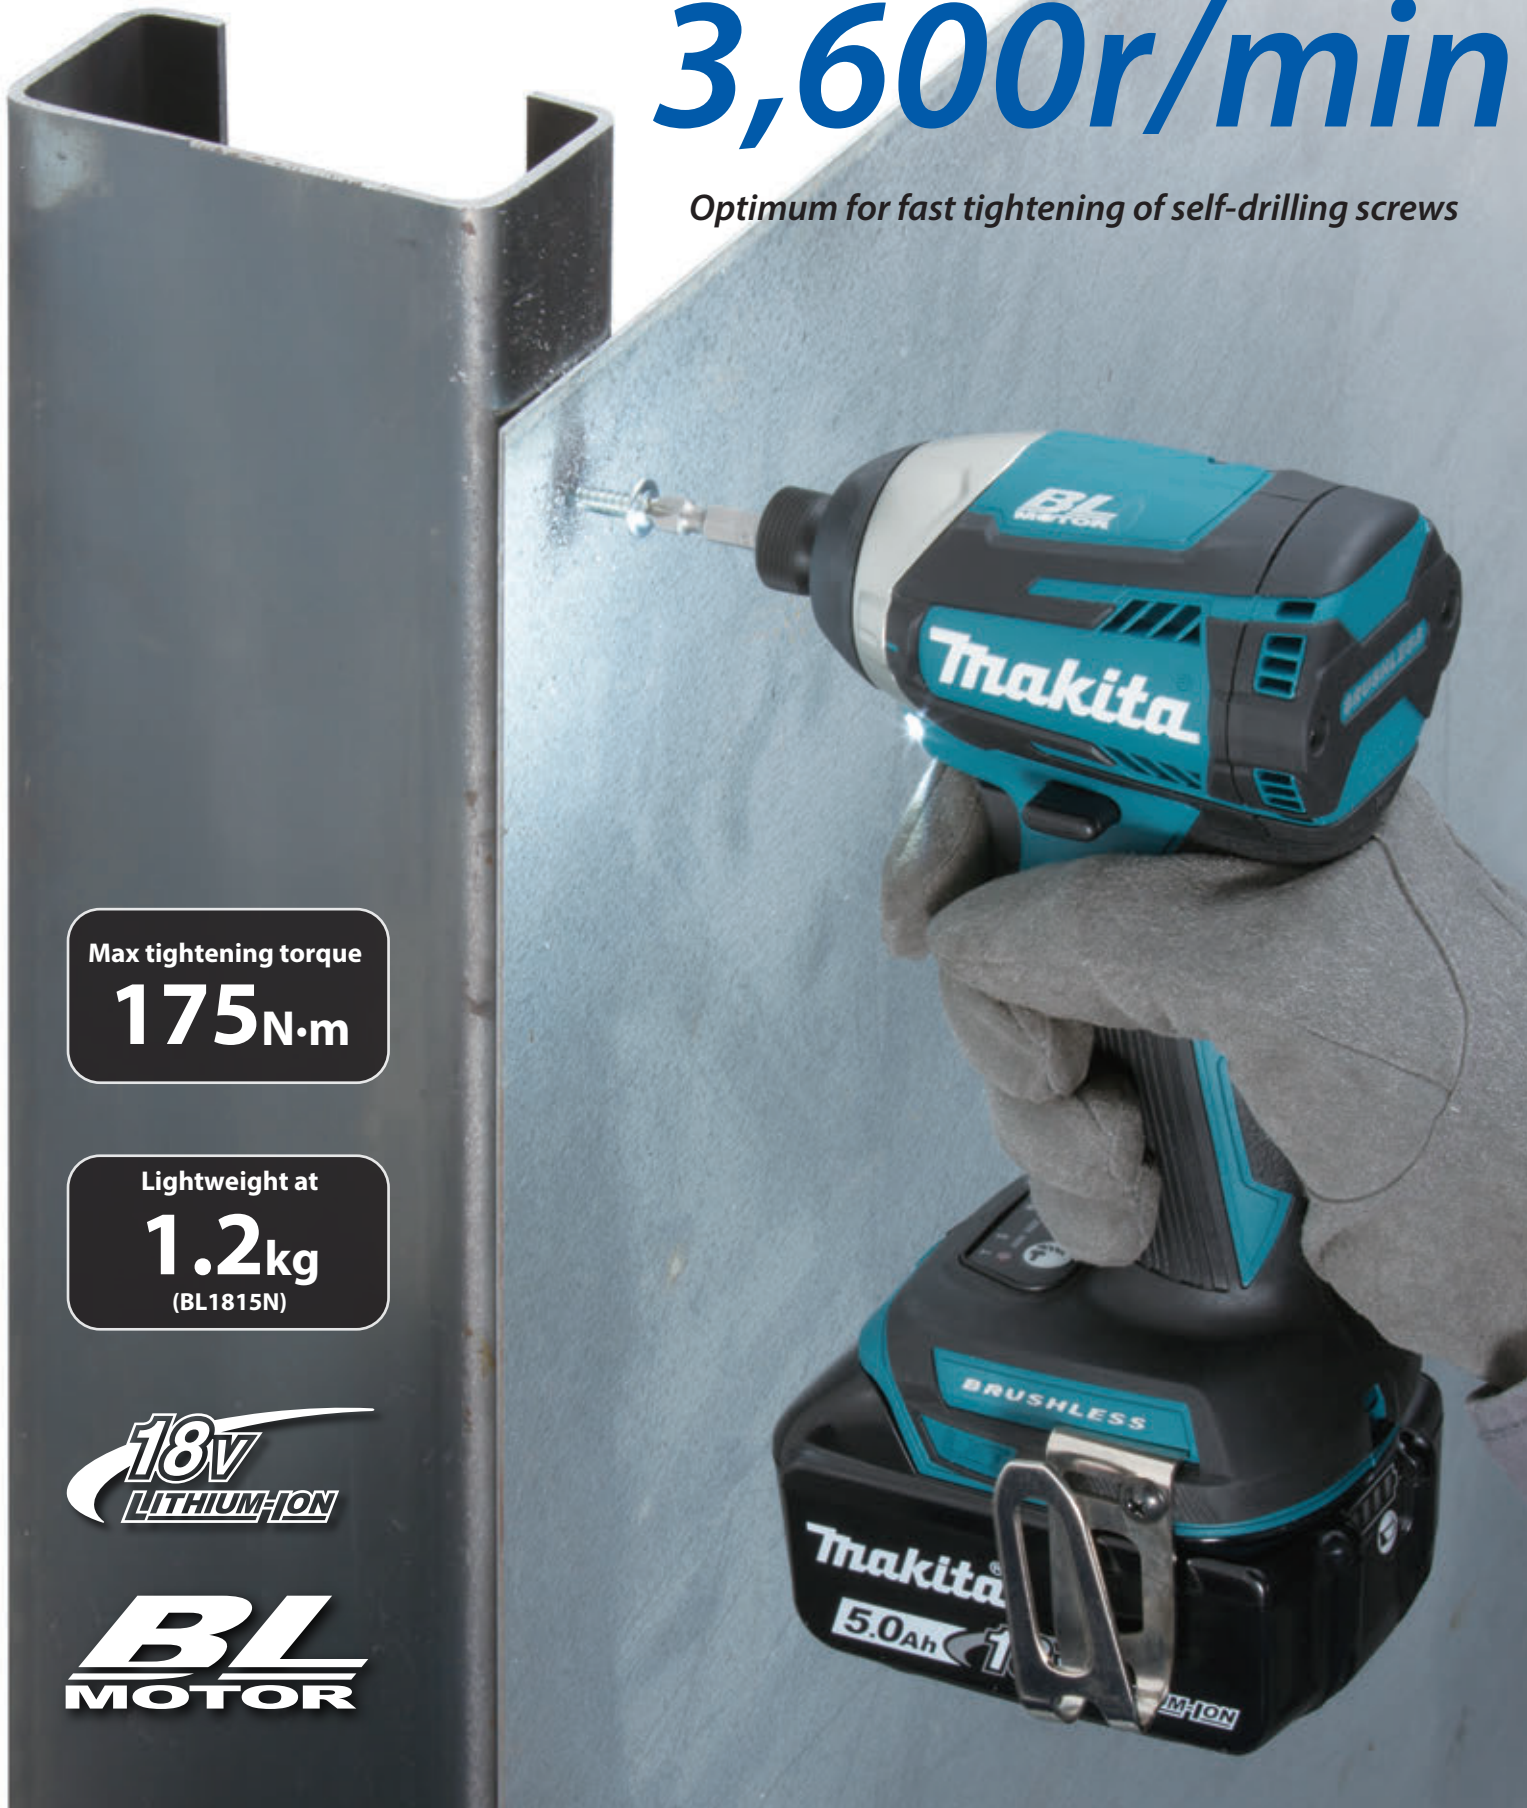

Max tightening torque

175N·m

Lightweight at

1.2kg
(BL1815N)



Aluminum hammer case
creates impression of rigidity of the machine.

One-touch bit installation
(For some countries only)
No need to pull bit sleeve for bit installation

Twin LED Job light with pre-glow and afterglow functions



Electronic 3 stage impact power selection
In order to reduce fault tightening, hard/medium/soft impact power can be selected to the material of workpiece or screw type simply by pushing a button.

T-mode:

Tightening mode for self-drilling screw
T-mode is a special mode optimum for fast tightening of self drilling screws without damaging the screw and the workpiece.



Variable speed control by trigger

Ergonomically designed handle with soft grip
provides comfortable grip and more control while minimizing hand fatigue and pain.






Powered by 18V Li-ion batteries

Belt clip



Battery / Charger (not included)

<p>with Battery fuel gauge</p>  <p>*without Battery fuel gauge</p>		<p>BL1860B (6.0Ah) BL1850B (5.0Ah) BL1830B (3.0Ah) *BL1815N (1.5Ah)</p>	<p>Fast charger DC18RC</p> 
---	---	---	--

Cordless Impact Driver			
DTD154Z			
 Variable Speed	Capacity	Machine screw :	M4 - M8
 Brake		Standard bolt :	M5 - M16
 Reversing		High strength bolt :	M5 - M14
 Electronic 3-Speed		Coarse thread (in length) :	22 - 125mm
 Built-in Job Light	Impacts per minute (i/min)		0 - 3,800 / 0 - 2,600 / 0 - 1,100
	No load speed (r/min)		0 - 3,600 / 0 - 2,100 / 0 - 1,100
	Max. fastening torque		175 N·m
	Vibration Level		12.5 m/s ²
	Sound Pressure Level		96 dB(A)
	Sound Power Level		107 dB(A)
	Dimensions (L x W x H)		117x79x236mm
	Net weight		BL1850B : 1.5kg BL1815N : 1.2kg

weight according to EPTA-Procedure 01/ver.2.1
Items of standard equipment and specifications may vary by country or area.

Battery and Charger Not Included!