



Rotary Hammer

HR2230 22mm

Satisfy Professional's Needs



SDS-Plus Shank



DRASTICALLY ENHANCED DURABILITY

Hi-Spec 2kg Rotary Hammer




Versatile 2kg Rotary Hammer



One-Touch Sliding Chuck
for Easy Bit Changes




Torque Limiter
:: When drill bit hits against reinforcements, Torque Limiter operates to stop.



No Hammering when Idling
:: Ensures machine's long life.



1 Lock-On Button
for Continuous Operation
2 Variable Speed

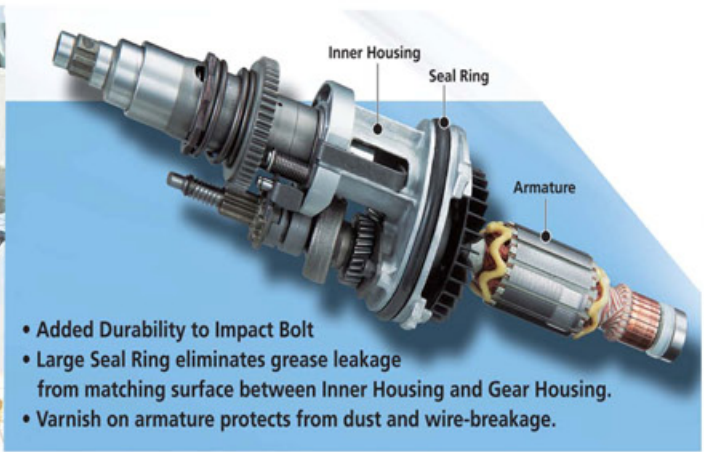

- Added Durability to Impact Bolt
- Large Seal Ring eliminates grease leakage from matching surface between Inner Housing and Gear Housing.
- Varnish on armature protects from dust and wire-breakage.

Rotation Reversing System Using Brush Holder Unit

Features the following advantages:

- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.



Rotary Hammer

HR2230

325

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- SDS-Plus Shank
- Carrying Case

Continuous rating Input	HR2230 710W
Capacity	
Concrete : (with diamond core bit)	65mm
Concrete : (with T.C.T. bit)	22mm
Steel :	13mm
Wood :	32mm
Impacts per minute	0-4,050ipm
No load speed	0-1,050rpm
Dimensions	357 x 84 x 214mm
Net weight	2.4kg
Power supply cord	4.0m

22mm Rotary Hammer

2 MODE

HR2230

710 W

2.4 kg



For further information contact Gauteng: (011)878-2600

Cape Town: (021)932-0568

Durban: (031)717-6400

Rutherford

A Div of Hudaqa Trading Ltd