




Combination Hammer
HR2475 24mm

Satisfy Professional's Needs



**DRASTICALLY
ENHANCED
DURABILITY**

Hi-Spec
Combination
Hammer

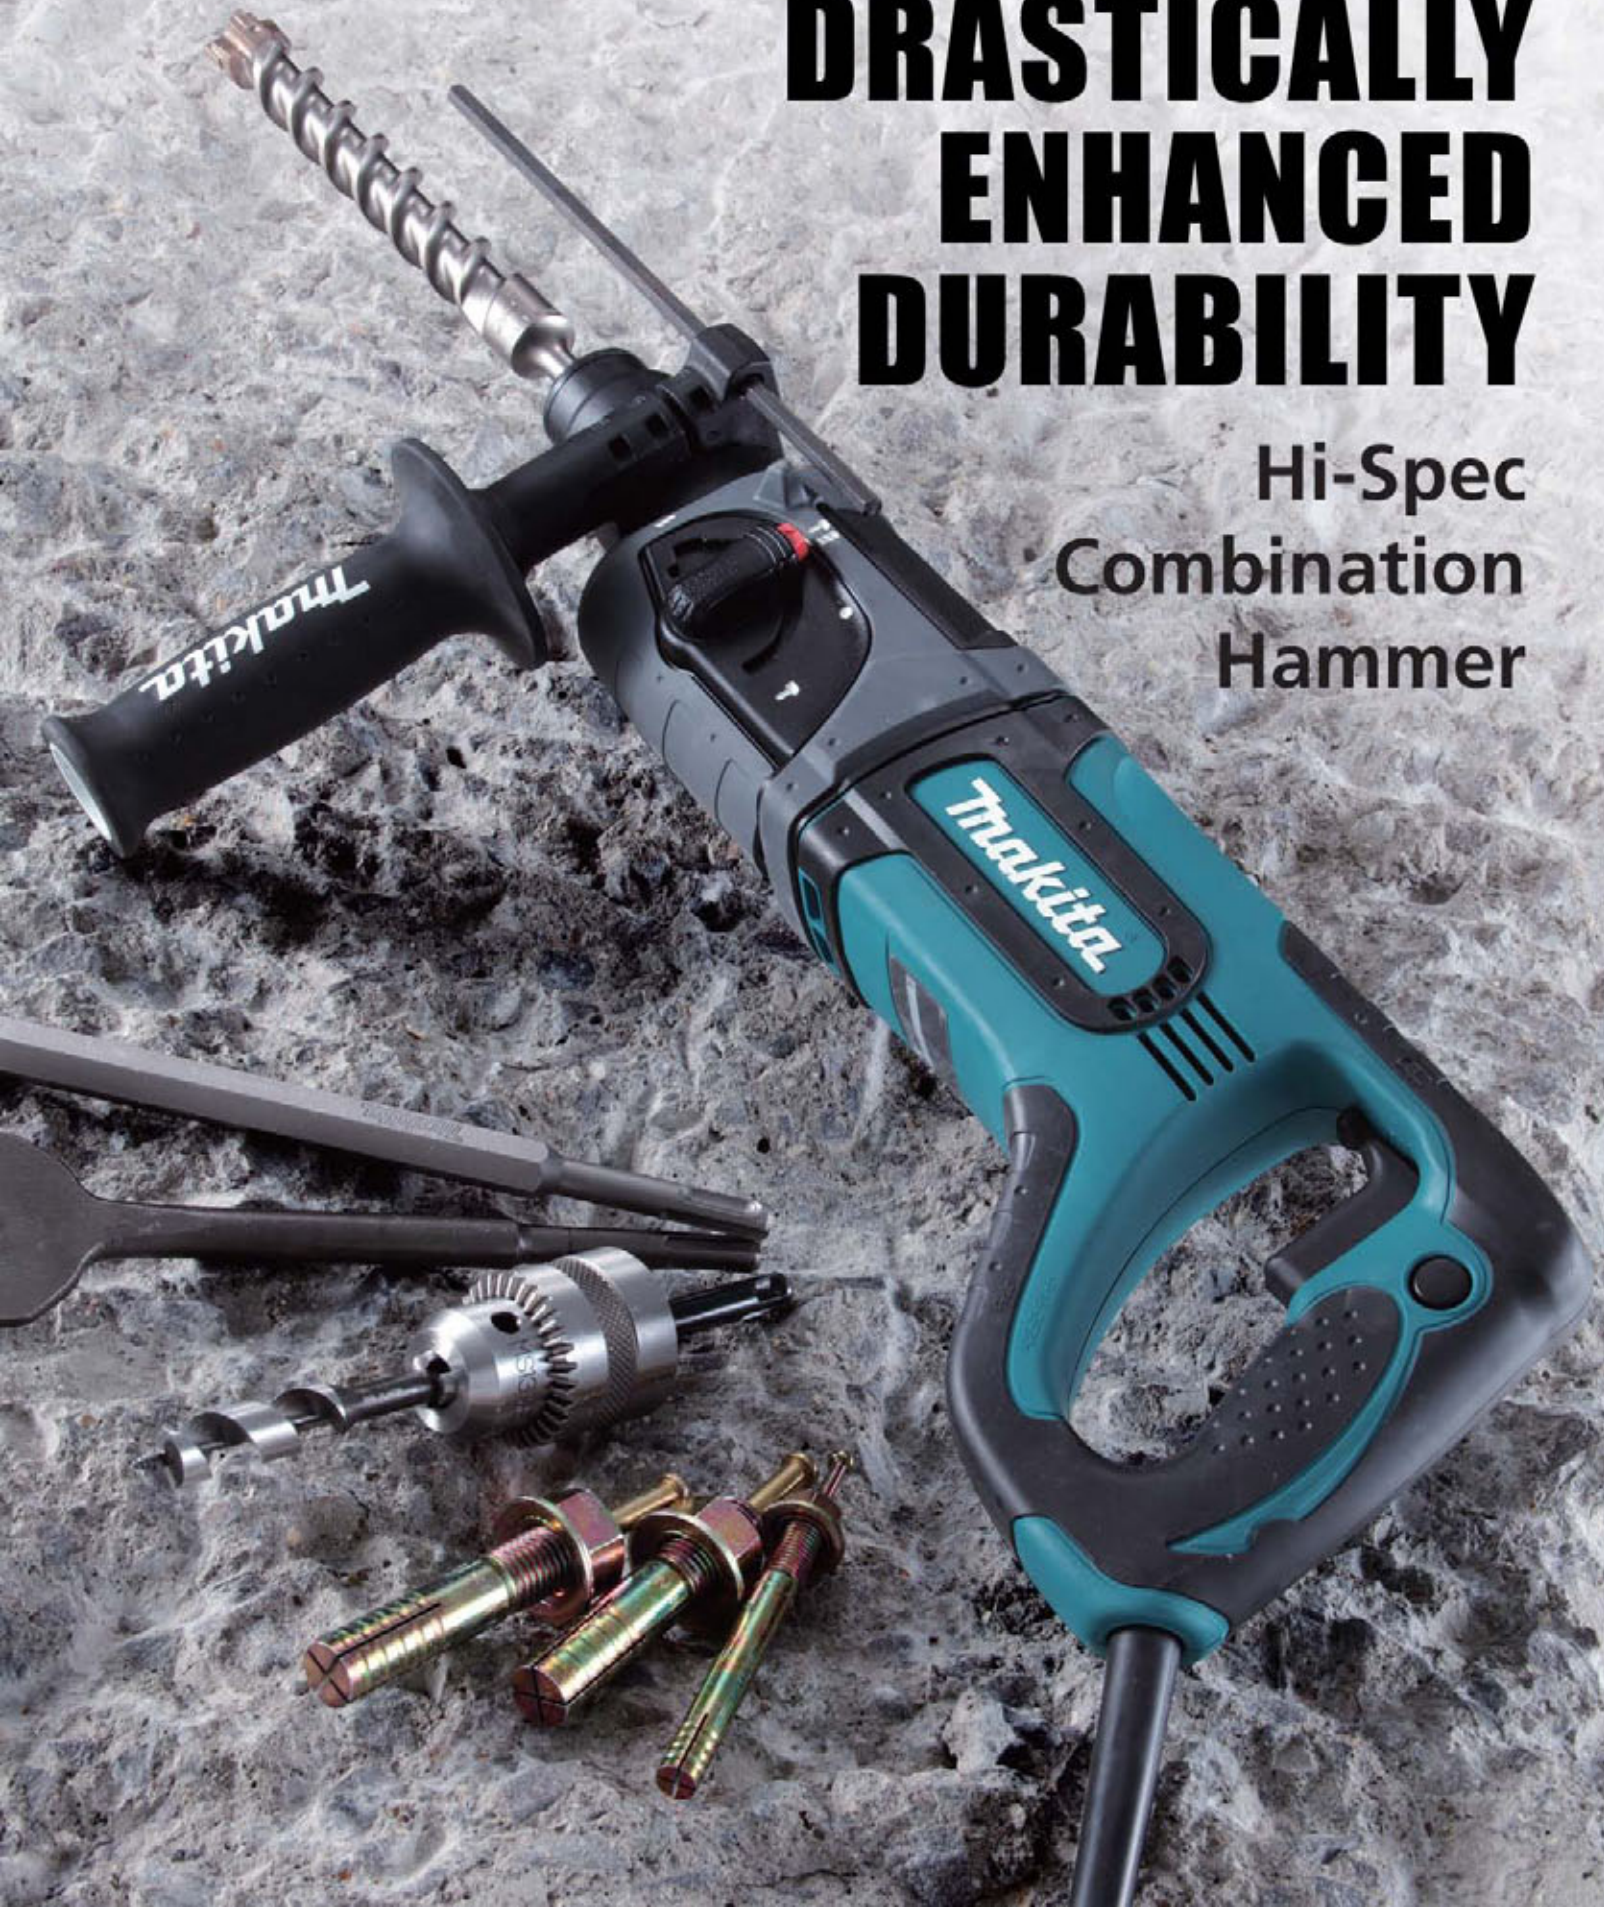

HIGH DURABILITY

- Added durability to impact bolt
- Large seal ring eliminates grease leakage from matching surface between inner housing and gear housing.
- Varnish on armature protects from dust and wire-breakage.



Combination Hammer

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- SDS-PLUS Shank
- Carrying Case



HR2475 24mm

419

Continuous rating Input Capacity	780W Concrete : 24mm Steel : 13mm Wood : 32mm
Impacts per minute (ipm)	0-4,500
No load speed (rpm)	0-1,100
Dimensions (L x W x H)	429 x 84 x 158mm
Net weight*	3.0kg
Power supply cord	4.0m

*weight according to EPTA-Procedure 01/2003

Standard Equipment

Side Handle, Depth Gauge (Tool does not come with bit.)