




# HR2610 Rotary Hammer 26mm



SDS-PLUS Shank


## 40 Different bit-angle settings

The bit-angle is adjustable without chisel adapter



## Minimum bit wobbling

with longer bit guide



## Easy depth adjustment


Depth gauge can be adjusted with a single motion.



## Rotation reversing system using brush holder unit

Features the following advantages:

- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.



## Torque Limiter

When drill bit hits against reinforcements, Torque limiter operates to stop

## Operation mode change lever


Positioned on the bottom of gear housing for reduced possibility of breakage

## One-touch sliding

**chuck** for easy bit changes



Rotation with hammering

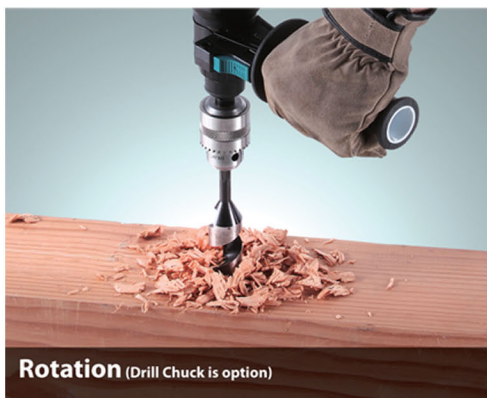

Rotation (Drill Chuck is option)

## Easy-to-grip handle

ergonomically designed to give maximum power thrust

## Rubberized soft grip

provides more comfort and control.



## HR2610 Rotary Hammer (3 mode) Adapted for SDS-PLUS bits

325

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Carrying Case



**Standard Equipment** : Side Grip, Depth Gauge  
(Tool does not come with bit.)

Items of standard equipment and specifications may vary by country or area.  
\*weight according to EPTA-Procedure 01/2003

## Hammering, Hammering with rotation and rotation only

3 Modes	
Continuous rating input	800W
Capacity	Concrete : 26mm
	Steel : 13mm
	Wood : 32mm
Impacts per minute (ipm)	0 - 4,600
No load speed (r/min)	0 - 1,200
Dimensions (L x W x H)	361x77x209mm
Net weight*	2.8kg
Power supply cord	4.0m