


SPECIFICATIONS

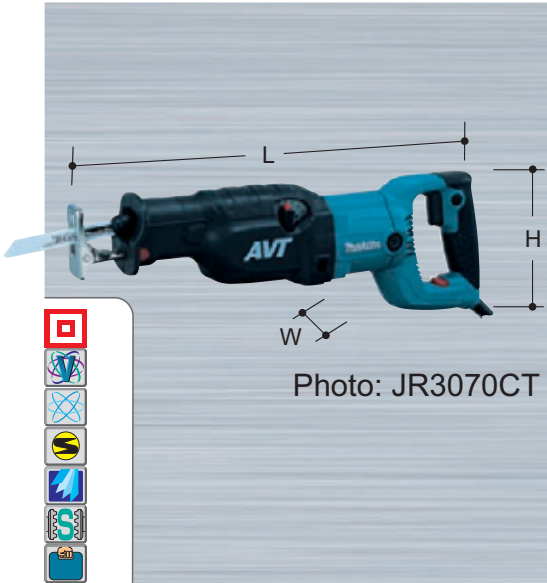

JR3070CT

Continuous rating Input	1,510 W
Capacities (when 300 mm blade used)	in pipe : ø130 mm in wood : 255 mm
Length of stroke	32 mm
Strokes per min.	0-2,800
Orbital function	Yes
Speed control	Yes
Constant speed	Yes
AVT	Yes
Vibration	9 m / s ²
Dimensions (L x W x H)	485 mm x 99 mm x 181 mm
Net weight	4.6 kg
Power supply cord	2.5 m
standard equipment	Recipro saw blade (3pcs.)

Anti Vibration Technology, double insulation, variable speed, electronic speed control, soft start, torque limiter, orbital cutting & carry case.

Specifications may differ from country to country. Items of standard equipment may differ from country to country.

OPTIONAL ACCESSORIES

Recipro saw blade

A : Includes nail embedded wood.

Blade type	Teeth per inch	Overall length (mm)	application	Type	Pc. per pkg.	Part No
No.21	24	120	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5 2	792146-3 B-00804
No.22	18	160	For steel plate, aluminum sash more than 3 mm thick. For iron pipe 90 mm dia. or less.	-	5 2	792147-1 B-00810
No.23	9	160	Wood cutting under 90 mm.	A	5 2	792148-9 B-00826
No.23B	6	160	Wood cutting under 90 mm. For fast finish work.	-	5	792707-9
No.24	24	160	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5 2	792149-7 B-00832
No.3019	4	150	For roughing-in work in thick wood.	-	5	A-02303
No.3020	10	150	For wood, plywood. 5	A	5	A-02319
No.3022	6	150	For scroll cutting of plywood and other laminates.	-	5	A-02331
No.3023	10	250	For wood, plywood.	-	5	B-00767
No.3030	6	300	For roughing-in work in thick wood.	-	5	B-03030

Makita
Recipro Saw
JR3060T, JR3070CT

Cutting Edge

AVTTM
ANTI VIBRATION TECHNOLOGY

AVT : Model JR3070CT only

■ JR3070CT ■




EXTRA COMFORT with AVT

Dust Proof Design No.1



Air from inside prevent the dust collected around slider.

Dust Proof Design No.2



Ring, and Rubber Seal protect gear room against dust.



Orbital Action
Selectable its degree with this lever for faster cutting in thick materials.

Constant Speed

Built-in controller maintains constant stroke speed under operational load. (JR3070CT only)

Large Trigger

for easier control



Photo : Model JR3070CT

Torque Limiter

protects gear mechanism and operator against accidental blade lock-up.

Soft Grip

for your comfort

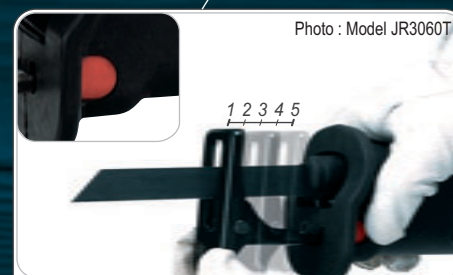


Photo : Model JR3060T

Shoe position can be adjusted in 5 positions.

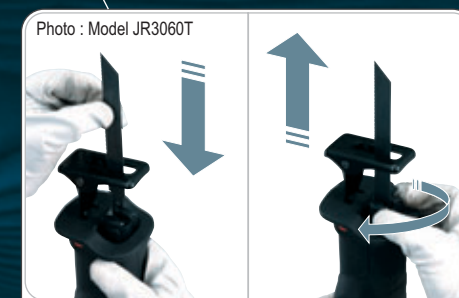


Photo : Model JR3060T

Tool-less Blade Change




Preset Dial for Speed Control
Enables to select the optimal stroke speed for application.

AVT™
ANTI VIBRATION TECHNOLOGY




VIBRATION 50% CUT

Extra-Low Vibration achieved by Counter Weight Mechanism

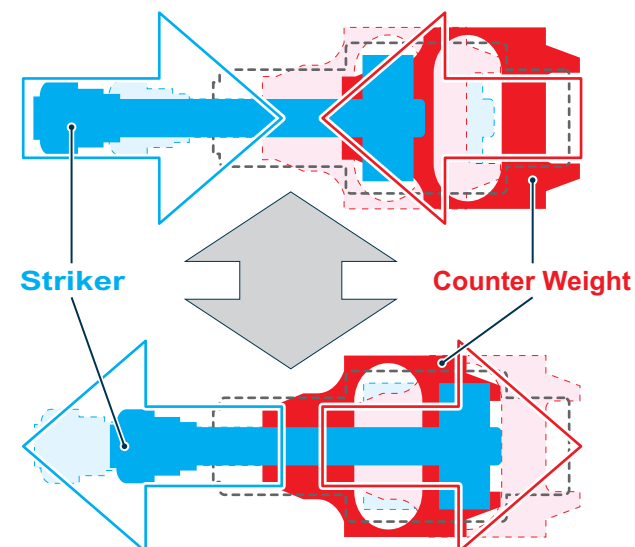

Model JR3070CT with AVT

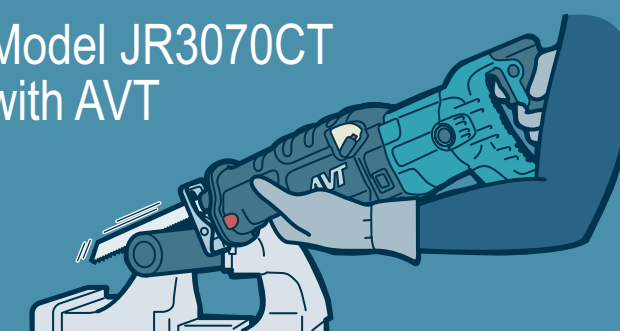

without AVT

