




## LED Flashlight BML802

Satisfy Professional's Needs

**LXT**  
LITHIUM-ION

**18V**  
LITHIUM-ION

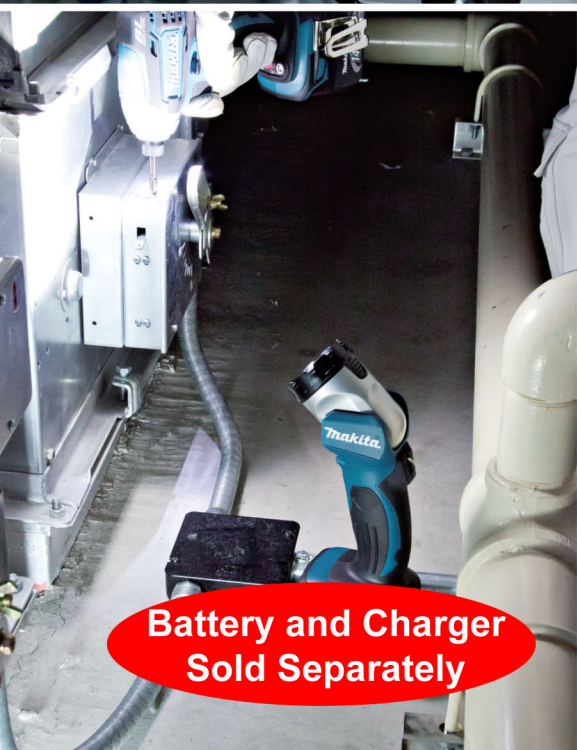

Battery and Charger  
Sold Separately



Battery is option.

# HIGH LUMINANCE 3.2W LED

# Long continuous illumination of 13 hours

with a fully charged 18V-3.0Ah battery BL1830


## 12 Position pivoting flashlight head

Positive stops at 110°, 90°, 75°, 60°, 45°, 30°, 15°, 0°, -15°, -30°, -45°, -60°



## Light source

Type : 3.2W single LED  
Illuminance : 4,000lx  
Luminous flux : 160lm  
Service life : 50,000hours or more

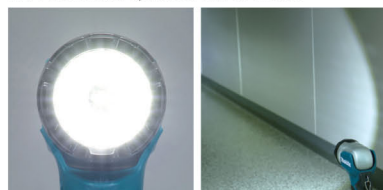

Illuminance: measured in ø20mm circle at the center of an illuminated field 1m in front of the light source.

## Multi-faceted reflector

controls the direction and spread of light cast from LED to provide a sharp round spot light with uniform high brightness.



## Strap hook

can be installed on the upper or lower position in accordance with usage.



## Compact size aluminum flashlight head

gives an impression of heavy-duty product.

Ergonomically designed handle with rubberized soft grip

On/Off switch



Battery is option.

## Battery



BL1830: 18V 3.0Ah  
BL1815: 18V 1.3Ah

## Charger

DC18RC / DC18RA  
Charging time  
22minutes



## LED Flashlight

## BML802 18V

Continuous use (hours)  
Dimensions (L x W x H)



13-3.0Ah, 6-1.3Ah  
272x79x116mm  
with BL1830  
256x79x116mm  
with BL1815

Net Weight\*

0.93kg with BL1830  
0.71kg with BL1815

**Standard Equipment :** Strap hook, Battery and Charger are sold separately.

\*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.