



Cordless Slide Compound Miter Saw  
DLS211 *AWS* / DLS212 305 mm (12")



# High power similar to AC Tool

For fast cutting and ripping



**175 cuts**  
Cutting 2x12 Wood  
(BL1850B)

**18v + 18v → 36v**

**BL MOTOR** **AWS** **ADT DXT**  
(DLS211)

# As powerful as AC model thanks to BL motor

**One-touch Sliding lock**  
can be easily done by removing/ inserting the lock pin.

**Independent laser switch**



**Excellent sliding durability of safety cover**

**Front knob for easy bevel angle adjustment**



Specialized EFFICUT blade


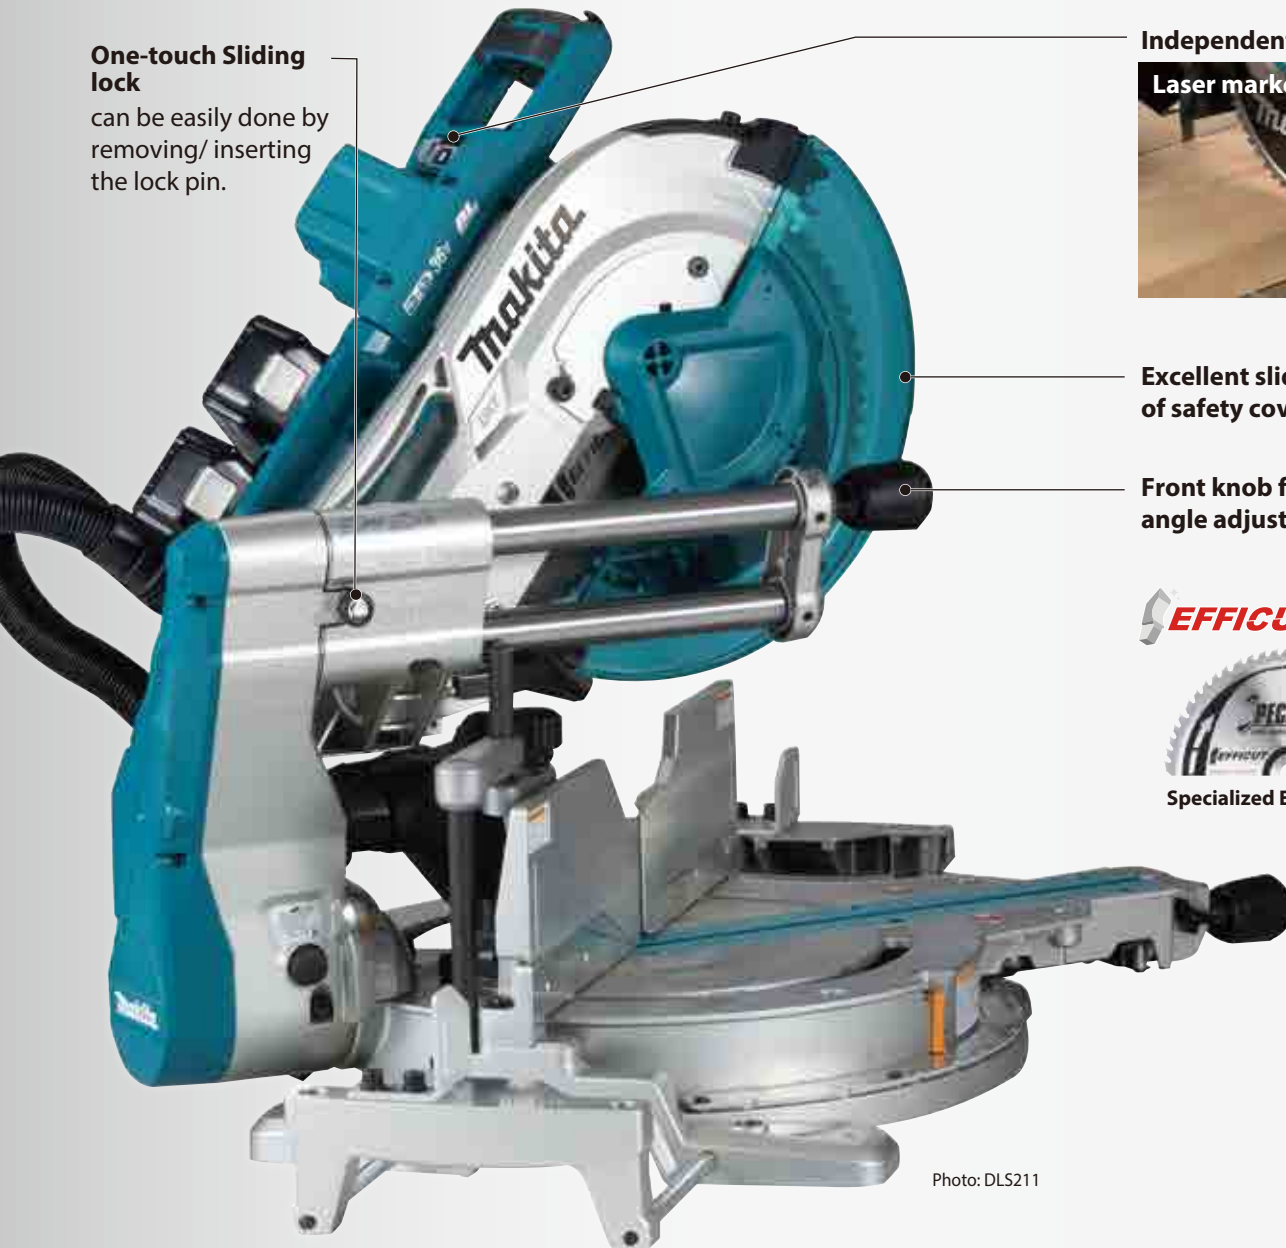


Photo: DLS211

# DXT

**By redesigning Arm section shape, the precision at bevel cutting is increased.**

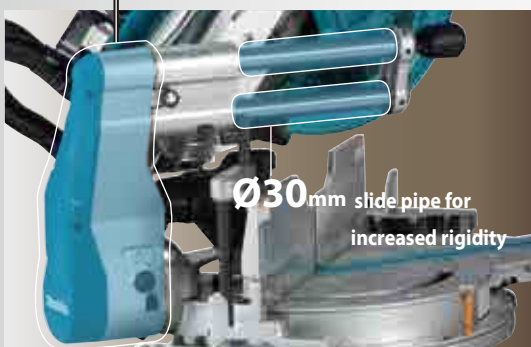

**Rail-forward design enables to be placed against a wall for maximizing work space**

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

**Conventional model**

needed to set apart from the wall



**DLS211 / DLS212**

can be placed close to wall



# High power for fast cutting and ripping

- 18V X2 Li-ion battery
- Brushless DC motor


18V + 18V → 36V

**BL**  
MOTOR

## **ADT** Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

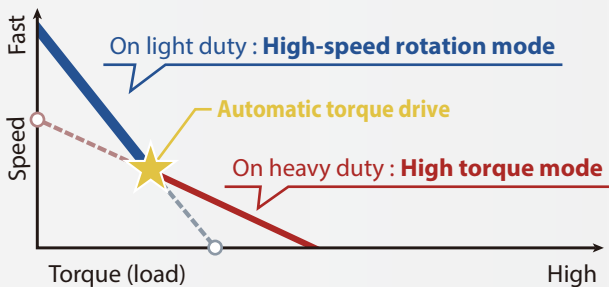

## **AWS** Auto-start Wireless System (DLS211 only)



### Wireless unit

Part No.  
198901-5  
198900-7(EU)  
199393-1(Asia)

### Expand AWS Line-up




### **Bluetooth** AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

## Excellent dust collection

When cutting the low thin workpiece, the dust collecting is more effective than current model because of the improved dual dust collecting port.




## Large turn base

supports even large workpiece stably.

## Easy-to-operate miter angle lock

Miter angle can be unlocked by turning Knob counterclockwise while pushing down Lock lever.

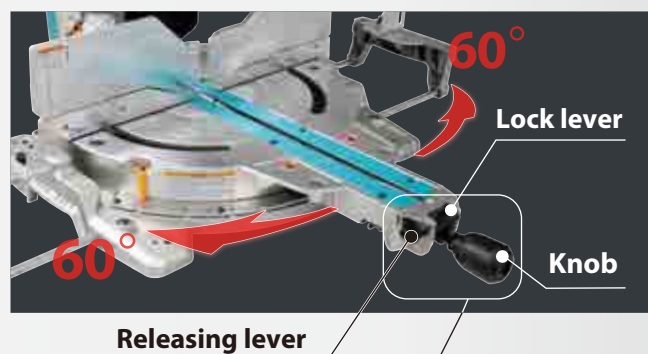

Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Miters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)


## Max. cutting capacity (height x width)

Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard (Skirt board)
92 x 382 (3-5/8" x 15")  107 x 363 (4-1/4" x 14-1/4")	Miter 45° left/right  92 x 268 (3-5/8" x 10-1/2") 107 x 255 (4-1/4" x 10")	Bevel 45° left  61 x 382 (2-3/8" x 15") 71 x 363 (2-13/16" x 14-1/4")	Bevel 45° left 61 x 268 (2-3/8" x 10-1/2")  Miter 45° left/right 71 x 255 (2-13/16" x 10")	Upright cutting 203 (8")	Upright cutting 171 (6-3/4")
	Miter 60° left/right  92 x 185 (3-5/8" x 7-1/4") 107 x 178 (4-1/4" x 7")	Bevel 45° right  44 x 382 (1-3/4" x 15") 54 x 363 (2-1/8" x 14-1/4")	Bevel 45° right 44 x 268 (1-3/4" x 10-1/2")  Miter 45° left/right 54 x 255 (2-1/8" x 10")		

(mm)

## Accessories

Specialized EFFICUT blade  
Size (mm)  
305 x 2.15 x 30 x 24T  
Part No. B-67256



Vertical vise assembly  
Part No. 126617-2



Stand  
Part No. WST06



Horizontal vise assembly  
Part No. 122470-4



Dust bag assembly  
Part No. 122852-0



Stand  
Part No. WST05

Crown molding stopper set  
Part No. 192628-9



Stand  
Part No. 194043-3



## Cordless Slide Compound Miter Saw

DLS211 / DLS212 305 mm (12")



- Brake
- Soft Start
- Bevel Cutting 45 LR
- Laser Marker
- Dust Collection

<b>Blade Diameter</b>	305 mm (12")
<b>Miter Angle</b>	60° L / 60° R
<b>Bevel Angle</b>	48° L / 48° R
<b>Max Cutting Capacity</b>	90° Miter: 107 x 363 mm (4-1/4" x 14-1/4") 90° Miter: 92 x 382 mm (3-5/8" x 15") 45° Miter, L/R: 107 x 255 mm (4-1/4" x 10") 45° Miter, L/R: 92 x 268 mm (3-5/8" x 10-1/2")
<b>No Load Speed (RPM)</b>	4,400
<b>Sound Pressure Level</b>	95 dB(A)
<b>Sound Power Level</b>	103 dB(A)
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Dimensions (L x W x H)</b>	898x690x725 mm (35-1/4"x27-1/4"x28-1/2")
<b>Net weight</b>	30.7 - 31.3 kg (67.6 - 69.1 lbs.)

### Standard Equipment:

TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Hex Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.