



HR2470 / HR2470T

24mm SDS Plus Rotary Hammer

780W

Depth gauge

Convenient for drilling holes of uniform depth.

Rubber bumper

Protects the surface of both the workpiece and machine.

Torque limiter



Protects motor from burnouts if the drill bit hits reinforcing.

SDS-plus shank


One-touch sliding chuck

For easy bit changes.

Quick change drill chuck

Only Model HR2470T

3-mode action

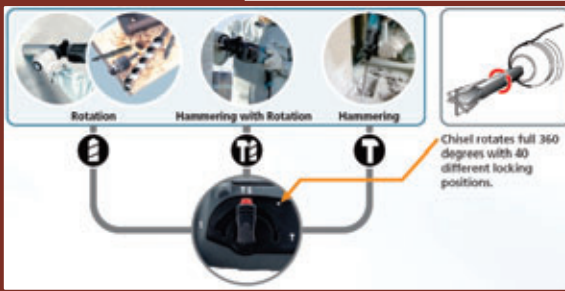

Rotation reversing system using brush holder unit features the following advantages:

Protects carbon brush from foreign dust and debris. Life of carbon brush is 2.7 times longer than existing models. Same speed and torque, even in reverse rotation. Simplified wiring saves time and labour on repairs.




MAKITA ADVANTAGE

Added durability to impact bolt and rubber ring at the commutator end of armature. The top portion of the tool holder, matching surface between inner housing and gear housing, as well as bearing portion on the drive-end of the armature are all designed to eliminate grease leakage. High abrasion resistance in gears and inlaid portion of inner housing. Anti-vibration construction of the motor section. Inner construction is designed so as to direct the flow of cooling air to minimize the chance of armature wire breaking due caused by dust.

Inner housing

Seal ring

Armature

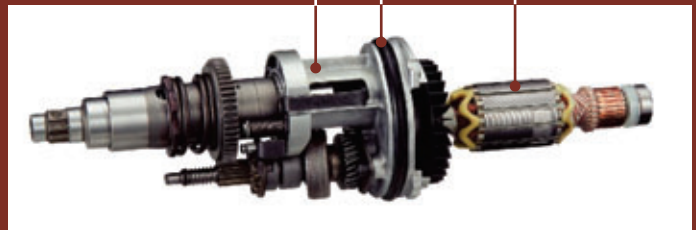

SPECIFICATIONS:

Capacities	
Concrete with TCT bit	24mm
Steel	13mm
Wood	32mm
Continuous rating input	780W
No load speed	0 - 1,100r/min
Blows per minute	0 - 4,500
Overall dimensions	370 x 84 x 214mm (HR2470) 394 x 84 x 214mm (HR2470T)
Net weight	2.9kg (HR2470) 3.0kg (HR2470T)
Power supply cord	2.5m
Joule rating	2.7 Joules

FEATURES:

Double insulation, SDS plus drive, variable speed, reversing, torque limiter & carry case

STANDARD EQUIPMENT:

Depth gauge & grip (Tools do not come with bit)

