




Blower UB1102 / UB1103

Max. Air Volume 4.1m³/min.

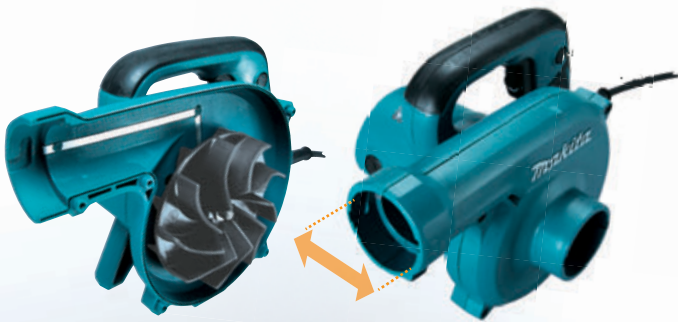

Newly designed double sided impeller and large blower outlet for a volume of air 46% larger



46% increased

in output air volume
over the predecessor model

Provides high power for a wide range of cleaning applications.



Ergonomically designed handlet

fits your hand perfectly to provide maximum comfort and control with less fatigue as illustrated below.



Optimum grip for downward applications



Grip for fatigueless operation

Soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.

Multi-function switch (UB1103)

Variable speed control by dial and trigger



Self-standing design

to put on the table / turn upside down

Anti-static electricity

prevents the accumulation of static electricity caused by dust taken into the machine.



Vacuum function

can be used as a vacuum with a dust bag.





Blower

UB1102 / UB1103

303

	UB1102	UB1103
Continuous rating Input	220V : 600W	220V : 600W
Air volume	4.1m ³ /min	0-4.1m ³ /min
Air pressure	5.7kPa (580mm H ₂ O)	0-5.7kPa (0-580mm H ₂ O)
No load speed (r/min)	16,000	0-16,000
Dimensions (L x W x H)	479x185x178mm	479x185x178mm
Net weight*	2.0kg	2.0kg
Power supply cord	2.5m	2.5m

 Double Insulation

 Variable speed (UB1103 only)

Standard Equipment :
Nozzle Assembly

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.