



Satisfy Professional's Needs

Random Orbit Sander BO5031



Ergonomically Contoured Grip with Non-Skid Elastomer Covered Surface

Fits Your Palm

perfectly



Smooth and Clean Sanding



Speed control dial
4,000-12,000rpm

Dust Bag or Dust box with Paper filter
Both dust collection systems are ready.

Dust box assembly
Part No. 135246-0

Paper filter
5pcs/ set
Part No. 194746-9

Dust can be thrown away with Paper filter.

Rubber switch cover prevents ingress of dust.

Bearing section with increased durability
obtained by using larger size ball bearing

Pad brake quickly stops motor after power switch is turned off.

High power motor and orbit action for heavy duty applications

Connectable to Makita vacuum cleaners without adapter



High dust extraction rate



Powerful
300 W

Accessories

Hose 28-1.5
Part No. 192278-0



Wool Pad
Part No. 794560-9



Sponge Pad
Part No. 794558-6



Felt Pad
Part No. 794559-4




Comparison of Efficiency

When sanding the following materials for 15 minutes with the following models with the same #120 abrasive paper using extension cord 1.25mm² x 50m. Note: The test results depend to a great extent on the hardness of the material, etc.


Numbers in charts below are relative values when the capacity of Competitor "D" is indexed at 100.

Material: SPF timber [Amount removed]

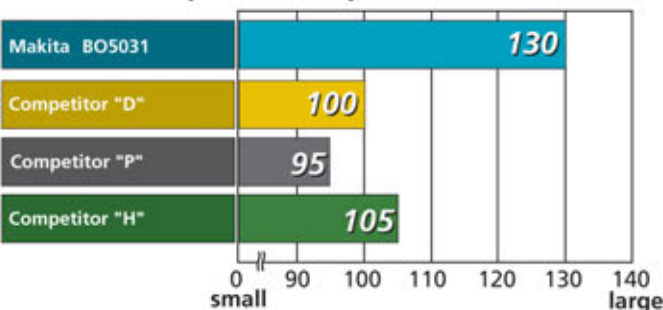

Numbers in charts below are dust extracting rate (Max. 100%)

Material: SPF timber [Dust extracting rate]

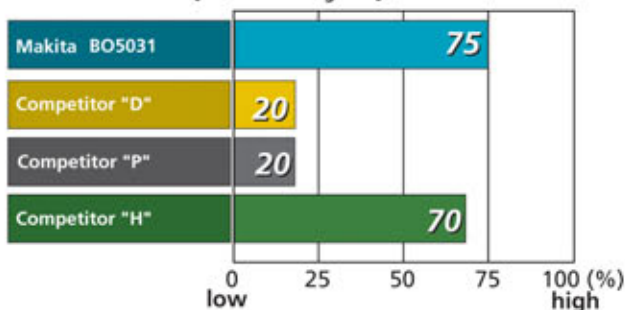

Random Orbit Sander

- Double Insulation
- Dust Collecting
- Hook & Loop
- Variable Speed



BO5031

BO5031

419

Continuous rating Input 300W
Pad diameter 123mm
Abrasive disc diameter 125mm
Orbits per minute (o/min) 4,000-12,000

Dimensions (L x W x H) 153 x 123 x 153mm
Net weight 1.3kg
Power supply cord 2.0m

Standard Equipment
Abrasive Disc, Dust Bag or Dust Box