


Makita Versatile 2kg Rotary Hammers



Comparison of Drilling Efficiency

Note: 1. It may differ under some conditions.
2. Numbers in the charts below are relative values when the capacities of Makita "HR2450" are indexed at 100.

Test conditions: Drilled in concrete with compressive strength of 40N/mm².

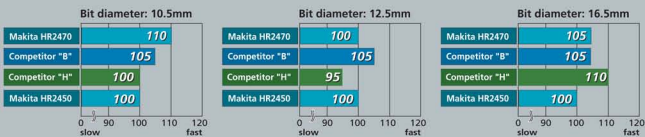

Rotary Hammer	HR2230, HR2460, HR2470	HR2470	
Double Insulation	HR2230 710W	HR2460 780W	HR2470 780W
Variable Speed			
Reversing			
Torque Limiter			
Dust Collecting			
SDS-Plus Shank			
Carrying Case			
Continuous rating Input	HR2230 710W	HR2460 780W	HR2470 780W
Capacity			
Concrete: (with diamond core bit)	65mm	65mm	65mm
Concrete: (with T.C.T. bit)	22mm	24mm	24mm
Steel:	13mm	13mm	13mm
Wood:	32mm	32mm	32mm
Impacts per minute	0-4,050ipm	0-4,500ipm	0-4,500ipm
No load speed	0-1,050rpm	0-1,100rpm	0-1,100rpm
Dimensions	357 x 84 x 214mm	362 x 84 x 214mm	370 x 84 x 214mm
Net weight	2.6kg	2.8kg	2.8kg
Power supply cord	4.0m	4.0m	4.0m

Standard Equipment: Depth Gauge, Side Grip (Tool does not come with bit.)

Items of standard equipment and specifications may differ by country or area.



Rotary Hammers


HR2230 22mm

HR2460 24mm

HR2470 24mm

"Combination Hammers"

Satisfy Professional's Needs

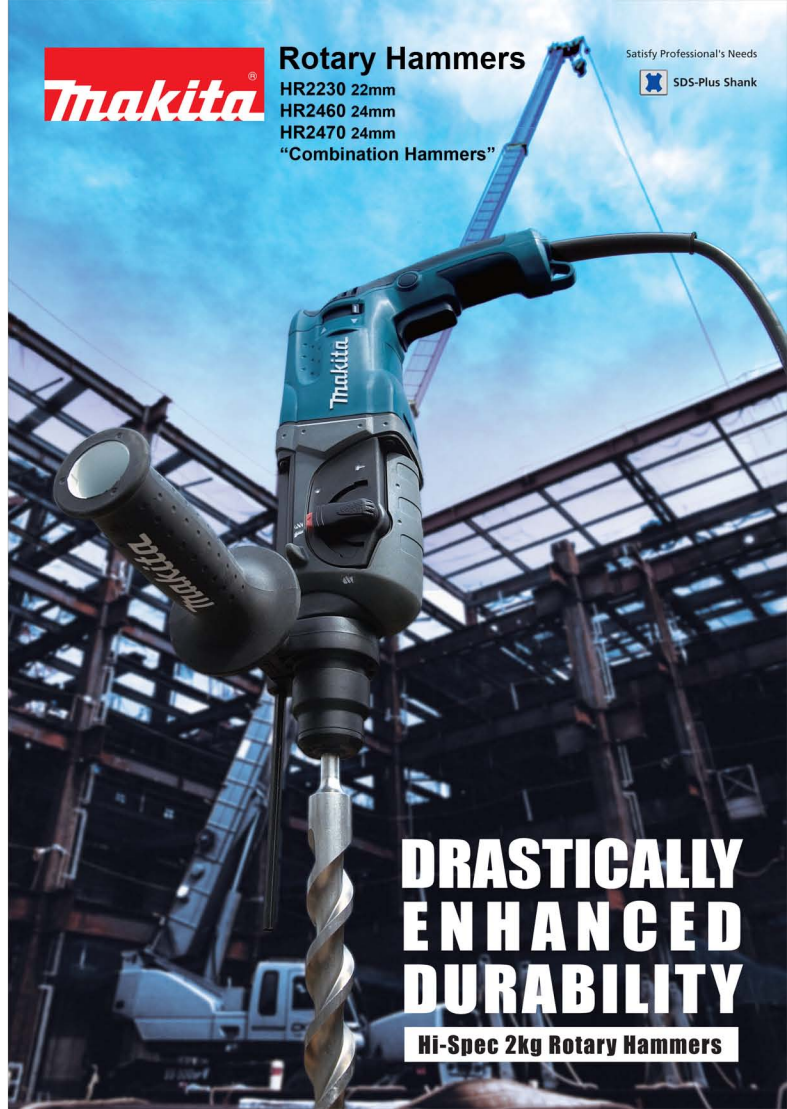

DRASTICALLY ENHANCED DURABILITY

Hi-Spec 2kg Rotary Hammers



For further information contact Gauteng: (011)878-2600

Cape Town: (021)932-0568

Durban: (031)717-6400



High Durability



- Added Durability to Impact Bolt
- Large Seal Ring eliminates grease leakage from matching surface between Inner Housing and Gear Housing.
- Varnish on armature protects from dust and wire-breakage.

Rotation Reversing System Using Brush Holder Unit

Features the following advantages:


- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.



One-Touch Sliding Chuck for Easy Bit Changes



Torque Limiter
When drill bit hits against reinforcements, Torque Limiter operates to stop.



No Hammering when Idling
Ensures machine's long life.



1 Lock-On Button for Continuous Operation
2 Variable Speed



Bumper
Protects the surface of workpiece and machine.

Rubberized Grip
Provides more control and comfort.

24mm Combination Hammers

3 MODE



HR2470

780 W 2,6 kg



24mm Rotary Hammers

2 MODE



HR2460

780 W 2,5 kg

22mm Rotary Hammer

2 MODE



HR2230

710 W 2,4 kg

Tool does not come with bit.